
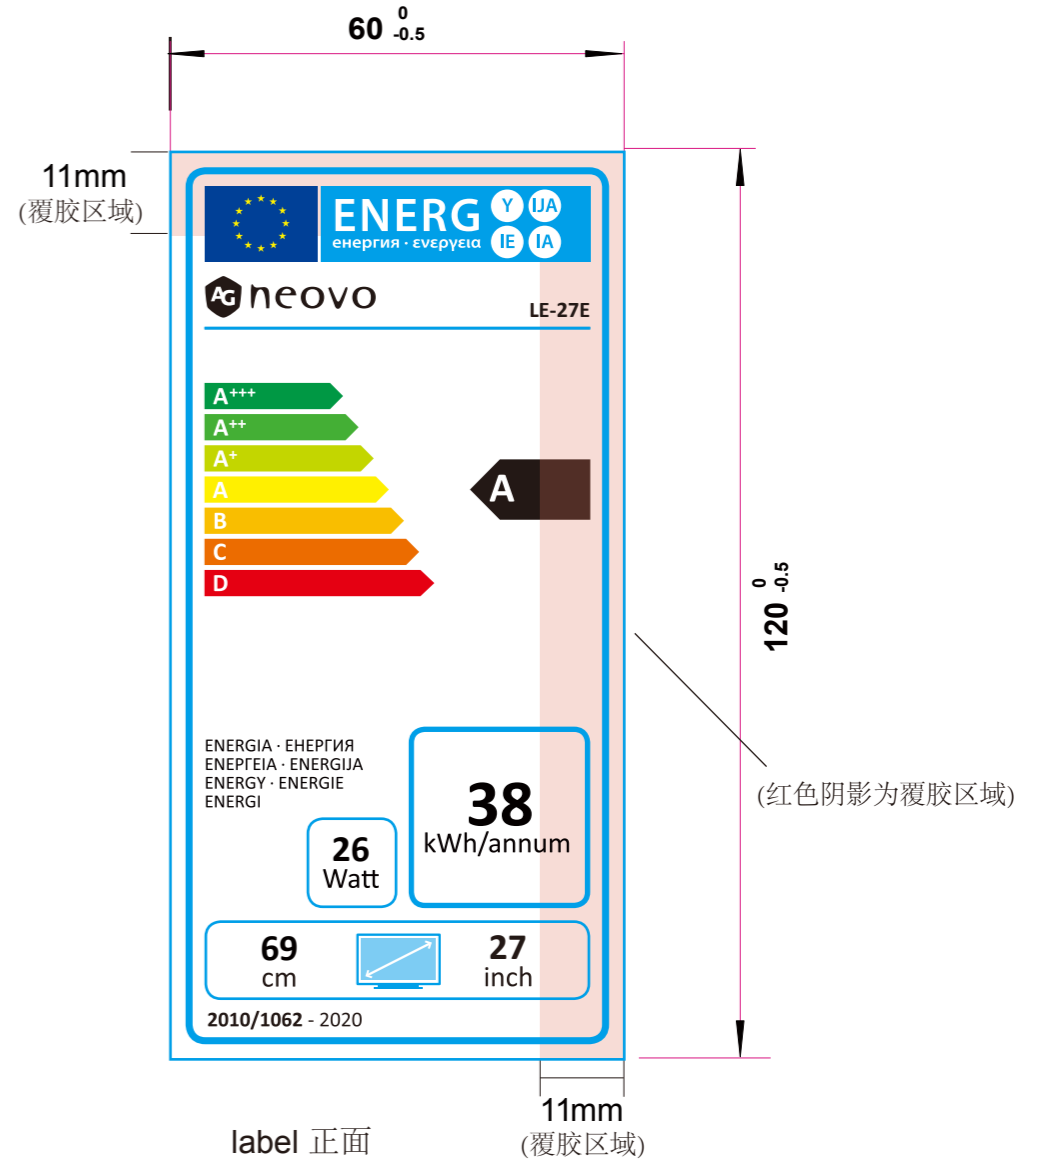
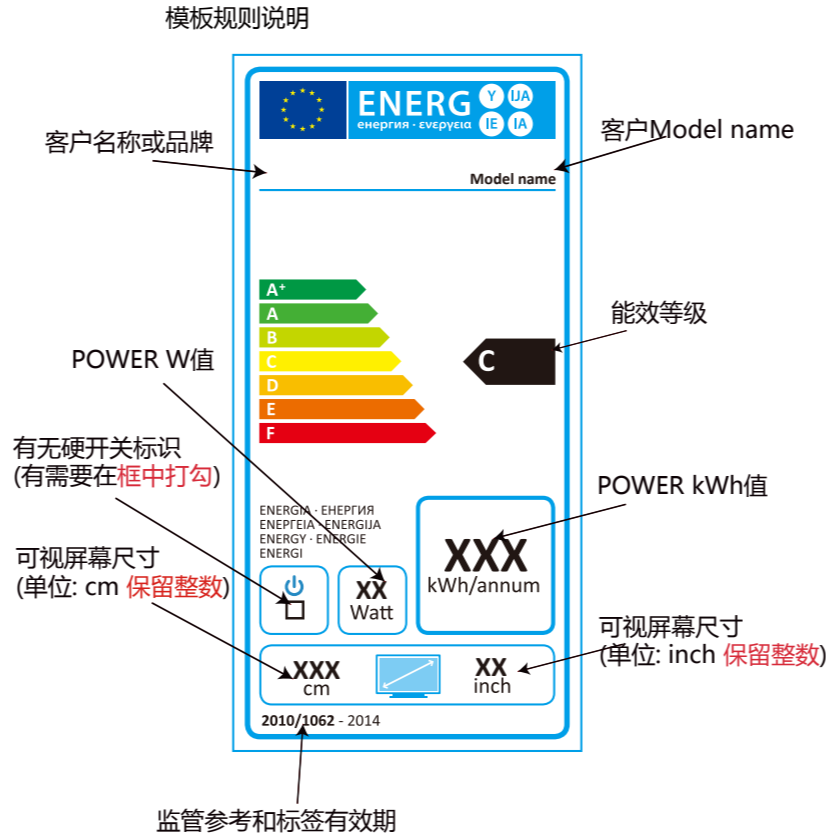


label 料号: label Part NO.: Q40G000788630B	
版本号Version NO. A <input checked="" type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/>	
客户 Customer	AG NEOVO
型号 Model	LE-27E
销向 Sales Area	EU
材质Material:	
包装方式Packing style: 卷状 <input checked="" type="checkbox"/> 片状 <input type="checkbox"/> Coil <input checked="" type="checkbox"/> Piece <input type="checkbox"/>	
安规签核Safety parts: Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>	
内销中文字体要求高度1.8mm以上 Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>	
颜色标注Color Mark	
针对带有UL logo的标签, 其厂家须在最小包装上标示UL Recognized Component Mark  公司名称, 型号及 UL file no.	
版本变更说明: Version Changed Description: 与Q40G000788630A相比 变更为2020版本	
备注Remark:	
xiaoling.zheng June-11-19	
捷联电子(福建)有限公司 TPV Electronics (Fujian) Co., Ltd. 地址(Add): 中国福建省福清市元洪路上郑 Shangzheng, Yuanhong Road, Fuqing City, Fujian Province, China 电话(Tel): +86-591-85285555 85285559 传真(Fax): +86-591-85285447 邮编(Postcode): 350301	

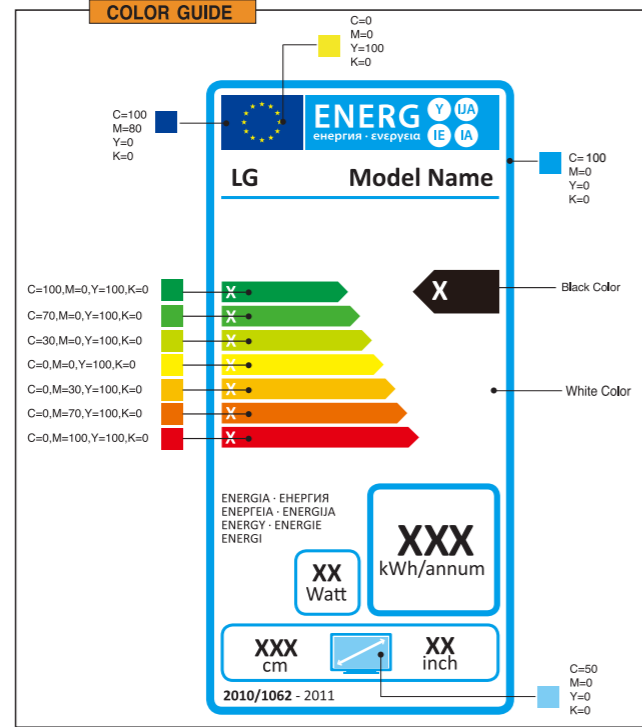

- NOTE:
- 1.印刷如上图
Printing as the drawing
 - 2.尺寸:具体见上图所示(公差: +/-0.2mm)
Dimension:as the above drawing(Tolerance:+0/-0.2mm)
 - 3.材质: 50番白色PET, 表面覆亮膜, 背面部分覆胶, 具体见图中
Color: See the drawing
 - 4.颜色: 如图所
Color:See the drawing
 - 5.贴附位置: 贴于前框保护膜上
 - 6.粘力: 将label切成25mm宽, 一端粘贴于钢板上, 以180°方向的力拉胶带另一端, 所得拉力即为粘力。用粘力测试仪进行测试。
Stickiness strength :Cut label into 25mm width ,one end paste on the plate , with 180 ° direction pulling the other end of the tape, the pull is stickiness strength. With stickiness strength instrument for testing.
 - 7.正常耐温测试: 在钢板上耐温范围为-20~100°C, 在80~100°C保持8小时后不翘角,不分层,不脱落,不起泡等。
在塑胶、纸箱上耐温范围为-20~65° C, 在65°C保持8小时后不翘角,不分层,不脱落,不起泡等。
The normal temperature test: The range of temperature on plate is -20 ~ 100 ° C . In 80 ~ 100 ° C to maintain 8 hours , the label should not be warp,delamination,frothy and so on. The range of temperature on plastic and carton is -20 ~ 65 ° C. In 65 ° C to maintain 8 hours ,the label should not be warp, delamination,frothy and so on.
 - 8.耐温湿度循环测试: 循环条件(贴在塑胶咬花面(PET)贴在塑胶咬花面): 温度-20~65°C, 湿度30~90%, 时间 96小时后不翘角不分层不脱落不起泡等。
Temperature and humidity cycle test : Cycle conditions(stick on texture(PET) , stick on texture):In temperature of -20 ~ 65 ° C and humidity of 30~90%to maintain 96 hours , the label should not be warp,delamination,frothy and so on.
 - 9.裁切需均匀且印刷不可有溢墨及颜色不均等不良现象
Printing ink can not have overflow and printing color can not be uneven etc.
 - 10.其它测试要求详见 (FQ-背胶类产品测试检验规格)

- 1) 根据 TPV 推行 RoHS 的有关规定, 所有的原材料及辅助材料必须符合 RoHS 的有关规定
- 2) 所有原材料的规定物质: 如镉 (Cd) 汞 (Hg) 铅 (Pb) 六价铬 PBB's PBDE's 及镉 (Cd)+汞 (Hg)+铅 (Pb)+六价铬 (针对随机出货的包装材料) 的具体含量依据最新版 RD EMS-01<<供应商环境管理物质管控标准>>的具体限值要求执行

- 1)According to the rule about RoHS of TPV,All raw material and assistant material and assistant material should accord with the rule of RoHS
- 2)All the stated substance of raw material: the actual content of Cd/Hg/Pb/Cr/PBB's/PBDE's and Cd+Hg+Pb+Cr(aim at the packing material with the product), should accord with the latest version of RD EMS-01<<The controlled standard aboutenvironment substance for supplier>>.