

IFP6504E-AE 65" SMART BOARD WITH EDLA CERTIFICATION




FEATURES

- **Android 13 and 128 GB Storage** - Provides robust performance and ample storage for your applications and data.
- **Google EDLA Certified** - Enable seamless collaboration with Google Docs, Sheets, and Slides.
- **Google Play Access** - Download a wide range of productivity and collaboration apps.
- **Meetboard Whiteboard App** - Intuitive tools for annotation, drawing, and collaboration.
- **Montage App Powered by DisplayNote** - Wireless presentations from any device, supporting AirPlay, Miracast, and Google Cast.
- **Integrated OPS Slot** - Expand functionality with Windows OS.
- **OfficeSuite App** - Supports Microsoft Word, Excel, and other file formats, ensuring compatibility with your office documents.
- **40-Point Multi-Touch** - Enhanced interactivity for dynamic collaboration sessions.
- **Cloud Storage Access** - Easily connect to Google Drive and OneDrive for seamless file access and sharing.
- **Management and Security** - App lock, USB lock, Samba service lock for easy management and secure usage.

The IFP6504E-AE 65" Smart Board is the premier choice for modern offices, combining cutting-edge software, powerful hardware, and an exceptional user experience. Designed to boost productivity and collaboration, this EDLA-certified smart board is perfect for 6-8 person meeting rooms and hybrid workplaces. Packed with advanced features, the IFP6504E-AE ensures efficient and seamless interactions, making it the ideal choice for brainstorming, meetings, and discussions.

TECHNICAL DRAWING

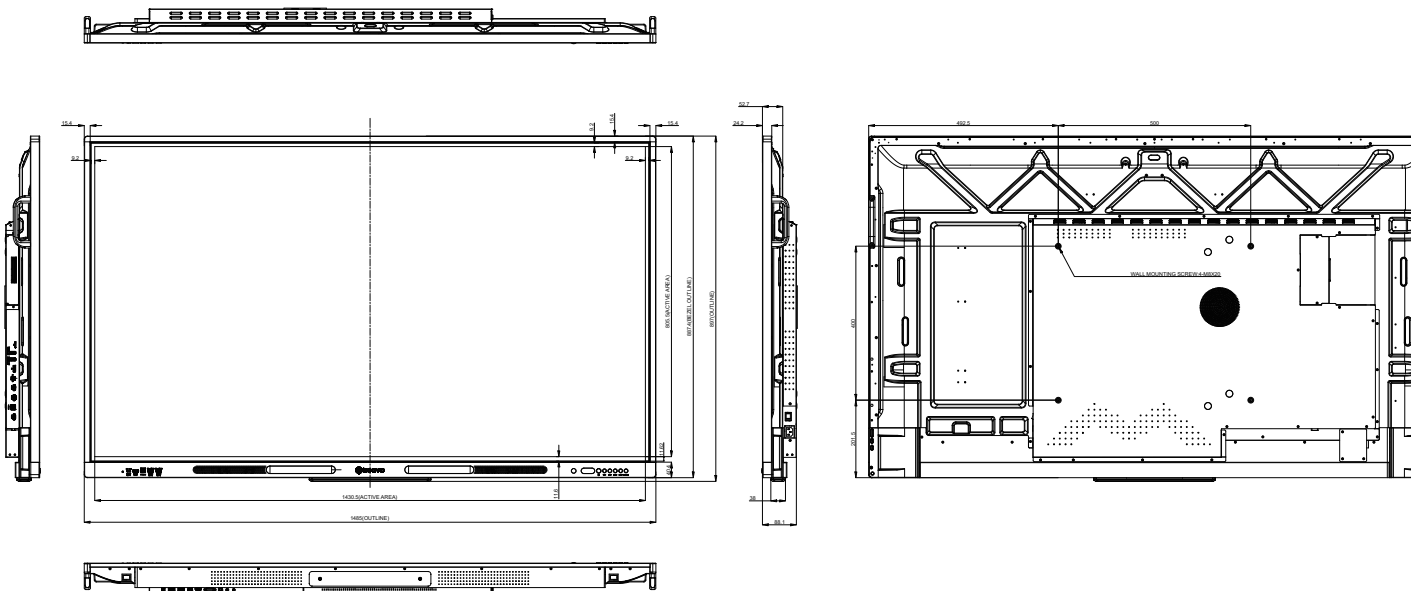

SPECIFICATIONS

Panel

| | |
|---------------------|--|
| Panel Type | LED-Backlit TFT LCD (VA Technology) |
| Panel Size | 64.5" |
| Max. Resolution | UHD 3840 x 2160 |
| Pixel Pitch | 0.372 mm |
| Brightness | 400 cd/m ² |
| Contrast Ratio | 4000 : 1 |
| Viewing Angle (H/V) | 178°/178° |
| Display Colour | 1.07G |
| Response Time | 5 ms |
| Surface Treatment | Anti-Glare Treatment (Haze 25%), 3H Hard Coating |

Frequency

| | |
|---------------|----------------|
| Frequency (H) | 28 kHz-140 kHz |
| Frequency (V) | 50 Hz-75 Hz |

Signal Input

| | |
|-------------|---|
| DisplayPort | 1.2 x 1 |
| HDMI | 1.4 x 1 / 2.0 x 3 |
| Type-C | Type-C x 1 (PD:65W) / Type-C x 1 (PD:15W) |

Signal Output

| | |
|--------|---------|
| HDMI | 2.0 x 1 |
| Type-C | x 1 |

External Control

| | |
|----------|-------------|
| RS232 In | 9-Pin D-Sub |
| LAN | RJ45 x 2 |

Embedded Player

| | |
|---------|-------------|
| OS | Android 13 |
| CPU | A76*4+A55*4 |
| Memory | 8GB DDR3 |
| Storage | 128GB |

Other Connectivity

| | |
|--------------------|---|
| USB | 2.0 x 1 , 3.0 x 4 (Service Port / Media Playback) |
| OPS Slot | Yes |
| Micro SD Card Slot | Yes |

Audio

| | |
|-------------------|------------------------------------|
| Audio In | Microphone (3.5 mm) |
| Audio Out | Stereo Audio Jack (3.5 mm), S/PDIF |
| Internal Speakers | 15W x 2 |

Touch Screen

| | |
|--------------------------|---|
| Technology | Infrared Touch Frame |
| Positional Accuracy | ±1.0 mm(90% area) |
| Panel Interface | USB (Type-B) 2.0 x 1/USB (Type-B) 3.0 x 1 |
| Single Touch Plug & Play | Windows XP/Linux (kernel 18.04.1)/MAC OS (10.14)/Chrome (73.0.3683.114 · 64bit) |
| Multi-touch Plug & Play | 40-point touch for Windows 11/10/8/7/Android |

Power

| | |
|--------------------|-----------------------|
| Power Supply | Internal |
| Power Requirements | AC 100-240V, 50/60 Hz |
| On Mode | 150W (On) |
| Standby Mode | < 0.5W |
| Off Mode | 0W |

Glass

| | |
|-----------------|--------|
| Thickness | 4mm |
| Reflection Rate | ≤ 8% |
| Gloss | 75±10% |
| Haze | 5-11% |
| Pencil Hardness | 8H |
| IK Rating | IK07 |

Operating Conditions

| | |
|-------------|--------------------------|
| Temperature | 0°C-40°C (32°F-104°F) |
| Humidity | 10%-90% (non-condensing) |

Storage Conditions

| | |
|-------------|--------------------------|
| Temperature | -20°C-60°C (-4°F-140°F) |
| Humidity | 10%-90% (non-condensing) |

Mounting

| | |
|--------------|--------------------|
| VESA FPM/PMI | Yes (500 x 400 mm) |
|--------------|--------------------|

Dimensions

| | |
|-------------------------------|--|
| Product with Base (W x H x D) | 1485.0 x 897.0 x 119.1 mm (58.5" x 35.3" x 4.69") |
| Product w/o Base (W x H x D) | 1485.0 x 897.0 x 88.1 mm (58.5" x 35.3" x 3.47") |
| Packaging (W x H x D) | 1645.0 x 1050.0 x 192.0 mm (64.8" x 41.3" x 7.56") |

Weight

| | |
|-------------------|--------------------|
| Product w/o Base | 38.1 kg (84.0 lb) |
| Product with Base | 40.9 kg (90.2 lb) |
| Packaging | 49.9 kg (110.0 lb) |

Regulation Approval


| | |
|-----------------------------|--|
| Certifications & Compliance | FCC, ICES-003 Issue 7, WEEE, RoHS, REACH, BSMI |
|-----------------------------|--|

Accessories

| | |
|----------|--|
| Supplied | Power Cord, HDMI Cable, Remote Control, Batteries, Quick Start Guide, Touch Pen, Wall Mount, USB-C Cable, USB Cable (Touch2.0) |
|----------|--|

Optional Accessories

| | |
|------------------------------|----------------------------------|
| Floor Mount | FMC-03 + LMK-04, FMC-04 + LMK-04 |
| Ceiling Mount | CMP-01+LMK-01 |
| Wall Mount | LMK-01, LMK-03, LMA-02 |
| Desk Mount | DTS-01 |
| Floor Mount (Landscape only) | FMC-06, FMC-07 |



All specifications are subject to change without prior notice.
Copyright © 2024 AG Neovo. All rights reserved.
The name AG Neovo is a trademark of AIC.
All other trademarks are the property of their respective owners.
P/C: I654A0 Version 2.0, 20241028